


PIM-Guard Three Way Tower Stand off Adapter

- Easy and quick installation
- Robust design & material for outdoor / indoor use
- Install with 3/8 in hardware, banding or hose clamps

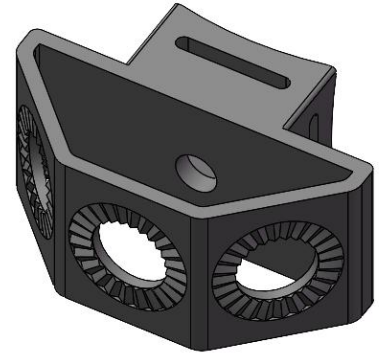

Product Classification

| | |
|--------------------|---|
| Material Number | 6004348 |
| Part Number | - |
| Status | Active |
| Detail Description | PIM-Guard three way tower stand off adapter |

General Specifications

| | |
|----------|----------------------------------|
| Material | PA6 |
| Color | Black |
| Mounting | 3/8 in through hole or 1 in slot |

Dimensions

| | |
|--------|------------------|
| Height | 1.614 in 41 mm |
| Width | 2.126 in 54 mm |
| Length | 3.425 in 87 mm |

Environmental Specifications

| | |
|-----------------------|--------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| UV Resistance | ≥1000 hours,base on ISO4892.3-1994 |

Packaging and Weights

| | |
|---------------|---|
| Bag,Height | 2.126 in 54 mm |
| Bag,Width | 8.661 in 220 mm |
| Bag,Length | 12.598 in 320 mm |
| Included | PIM-Guard three way tower stand off adapter |
| UOM | Kit of 10 |
| Packaging | Bag |
| Weight, gross | 1.393 lb 0.632 kg |

Certifications and Compliance

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

RoHS

Compliant

