


## Tinned Universal Grounding Kit ,for cable 1/2"-3",1.5 m, without installation accessories and waterproofing kit

- Easy and quick installation
- Low contact transition resistance of maximum 10mΩ
- Suitable for 1/2"-3" coaxial cable
- Operation Temperature -40°C~70 °C

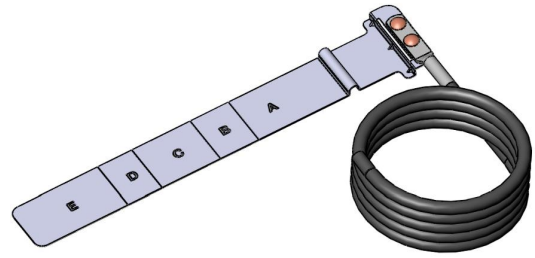

### Product Classification

Item Number	6003917
Part Number	-
Status	Active
Detail Description	Tinned Universal Grounding Kit,for cable 1/2"-3", 1.5m, without installation accessories and waterproofing kit

### General Specifications

Bonding Conductor Jacket Material	PVC
Bonding Conductor Material	Copper
Bonding Conductor Wire Size	AWG6
Cable Color	Black
Grounding Strap Material	Tinned Copper

### Dimensions

Bonding Conductor Length	1.5 mm   60 in
Suitable Cable	1/2"-3"

### Electrical Specifications

Contact Transition Resistance	≤ 10mΩ
Lightning Current Carrying Capability	25 KA

### Environmental Specifications

Operating Temperature	-40 °C to +70 °C
Storage Temperature	-40 °C to +70 °C

### Packaging and Weights

Height, packed	370 mm   14.56 in
Width, packed	210 mm   8.26 in
Included	Grounding kit

UOM	Kit
Packaging	Bag
Weight, gross	0.20 kg   0.43 lb

---

**Certifications and Compliance**

---

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

