


## Tinned Universal Grounding Kit ,for cable 1/2"-3",1.5 m, without hardware kit and waterproofing kit

- Easy and quick installation
- Low contact transition resistance of maximum 10mΩ
- Suitable for 1/2"-3" coaxial cable
- Operation Temperature -40°C~70 °C

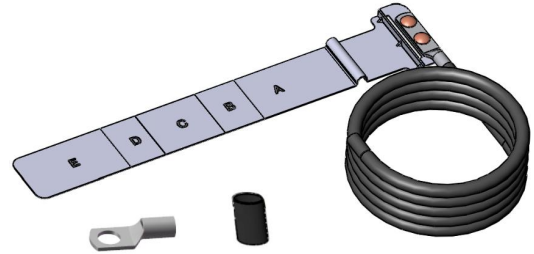

### Product Classification

Item Number	6006214
Part Number	-
Status	Active
Detail Description	Tinned Universal Grounding Kit,for cable 1/2"-3", 1.5m, without hardware kit and waterproofing kit

### General Specifications

Bonding Conductor Jacket Material	PVC
Bonding Conductor Material	Copper
Bonding Conductor Wire Size	AWG6
Cable Color	Black
Grounding Strap Material	Tinned Copper
Lug Type	Single lug

### Dimensions

Bonding Conductor Length	1.5 mm   60 in
Suitable Cable	1/2"-3"
Lug Hole Size	6 mm

### Electrical Specifications

Contact Transition Resistance	≤ 10mΩ
Lightning Current Carrying Capability	25 KA

### Environmental Specifications

Operating Temperature	-40 °C to +70 °C
Storage Temperature	-40 °C to +70 °C

### Packaging and Weights

For more information, please visit:  
[www.maxdao.com](http://www.maxdao.com)



©Copyright 2023 Maxdao Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: Sep 16, 2023

Public

DATASHEET

Height, packed	370 mm   14.56 in
Width, packed	210 mm   8.26 in
Included	Grounding kit   Hardware   Lug
UOM	Kit
Packaging	Bag
Weight, gross	0.32 kg   0.71 lb

---

**Certifications and Compliance**

---

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

