


## Copper Lug, AWG 14-10#, two hole 10#, hole spacing 5/8", 90 degree standard barrel, with inspection window

- Copper cable lugs are designed for connecting copper cables, coils and Bus-bars.
- Copper Tube Terminals between 6mm<sup>2</sup> & 800mm<sup>2</sup> have bell entry to ensure easy entry even for flexible conductors.
- Incorporates inspection window to check the correct cable positioning.
- 90 degree standard barrel for limited space applications.

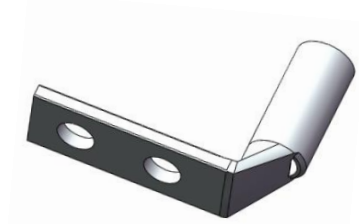


### Product Classification

|                    |  |
|--------------------|--|
| Material Code      | 6006936  |
| Part Number        | -  |
| Detail Description | Copper Lug, AWG 14-10#, two hole 10#, hole spacing 5/8", 90 degree standard barrel, with inspection window |

### General Specifications

|                   |                        |
|-------------------|------------------------|
| Material          | Copper                 |
| Tongue Type       | Standard               |
| Tongue Angle      | 90 degree              |
| Surface           | Tin-plated             |
| Inspection Window | With inspection window |

### Dimensions

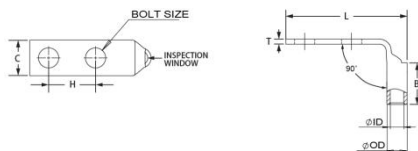

|                     |                   |
|---------------------|-------------------|
| Bolt Size           | 0.20 in   5.2 mm  |
| Hole Spacing (H)    | 5/8 in   16.0 mm  |
| Tang Width (C)      | 0.36 in   9.5 mm  |
| Barrel length (B)   | 0.38 in   9.7 mm  |
| Overall length (L)  | 1.47 in   36.5 mm |
| Inner diameter (ID) | 0.13 in   3.4 mm  |
| Outer diameter (OD) | 0.22 in   5.6 mm  |

### Electrical Specifications

|                          |      |
|--------------------------|------|
| Rating - Maximum Voltage | 35KV |
|--------------------------|------|

### Environmental Specifications

|                       |                                     |
|-----------------------|-------------------------------------|
| Operating Temperature | -40 °C to +90°C (-40 °F to +212 °F) |
|-----------------------|-------------------------------------|

Storage Temperature -40 °C to +80 °C (-40 °F to +176 °F)

---

**Packaging and Weights**

---

|                            |                     |
|----------------------------|---------------------|
| Included                   | Lug                 |
| Packaging Quantity and UOM | 1 pcs               |
| Piece Weight               | 0.015 lb   0.007 kg |

---

**Certifications**

---

|               |  |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| RoHS          | Compliant  |
| UL&CSA        | Compliant  |

