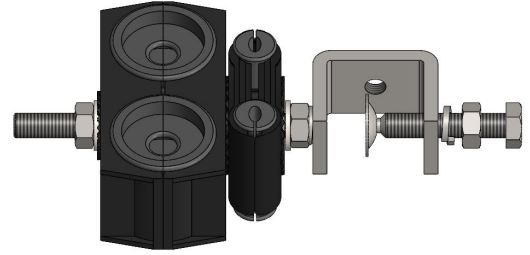


**Feeder Cable Clamp, for 2×(4-7)+2×(15-25) mm Cable**

- Easy and quick installation
- Robust design & material for outdoor use
- Operation Temperature -40~85 °C
- Suitable for cable type (4-7)+(15-25) mm

**Product Classification**

|                    |  |
|--------------------|--|
| Material Code      | 6004300  |
| Part Number        | -  |
| Status             | Active   |
| Detail Description | Feeder cable clamp, for 2×(4-7)+2×(15-25) mm cable, 4 way, includes hardware and angle adapter |

**General Specifications**

|                   |                         |
|-------------------|-------------------------|
| Material Parts    | Stainless steel+PP+EPDM |
| Mounting          | M8 hardware             |
| Cables per hanger | 4                       |
| Color             | Black                   |

**Dimensions**

|                              |                         |
|------------------------------|-------------------------|
| Height                       | 42 mm   1.65 in         |
| Width                        | 80 mm   3.15 in         |
| Length                       | 175 mm   6.89 in        |
| Compatible cable OD, maximum | 15-25 mm   0.59-0.98 in |
| Compatible cable OD, minimum | 4-7 mm   0.16-0.28 in   |

**Environmental Specifications**

|                                 |                                   |
|---------------------------------|-----------------------------------|
| Salt spray test for metal parts | ≥48 Hours, base on ISO 9227: 2017 |
| Operating temperature           | -40°C ~ 85°C                      |

**Packaging and Weights**

|                            |                  |
|----------------------------|------------------|
| Height, packed             | 205 mm   8.1 in  |
| Width, packed              | 325 mm   12.8 in |
| Length, packed             | 495 mm   19.4 in |
| Packaging Quantity and UOM | 1 pcs            |

Weight, gross

0.24 kg | 0.53 lb

---

**Certifications and Compliance**

ISO 9001:2015

Designed,manufactured and/or distributed under this quality management system

RoHS

Compliant

