


## Grounding Kit, High Speed Type, 1/4", 0.6 Meter

- Easy and quick installation
- Low contact transition resistance of maximum 10mΩ
- Operation Temperature -40~70 °C
- Waterproof IP67

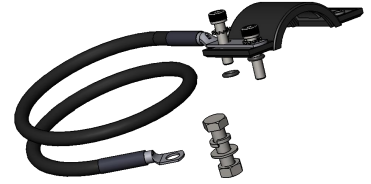

### Product Classification

Item Number	6008095
Part Number	-
Detail Description	Grounding kit, high speed type, for 1/4" cable, 0.6 Meter, installation accessories including

### General Specifications

Bonding Conductor Material	Copper, Tin Plated
Bonding Conductor Wire Size	AWG6
Grounding Strap Material	Stainless Steel Coated EPDM
Lug Type	One-hole lug
Screw Material	Stainless Steel
Flat washer Material	Stainless Steel
Spring washer Material	Stainless Steel
Nut Material	Stainless Steel

### Dimensions

Bonding Conductor Length	0.6 m   2 feet
Lug Hole Size	M8
Screw Size	M8x25 mm
Suitable Cable	1/4"

### Environmental Specifications

Operating Temperature	-40°C to +70 °C (-40 °F to +158 °F)
-----------------------	-------------------------------------

### Electrical Specifications

Contact Transition Resistance	Maximum 10mΩ
-------------------------------	--------------

### Packaging and Weights

Height, Packed	200 mm   7.87 in
Width, Packed	200 mm   7.87 in
Included	Grounding kit   Hardware   Release Paper

For more information, please visit:  
[www.maxdao.com](http://www.maxdao.com)



©Maxdao Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: Aug 21, 2024  
 Public

UOM	Kit
Packaging	Bag
Weight, Gross	0.181 kg   0.399 lbs
<b>Certifications and Compliance</b>	
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

