


Feeder Cable Clamp, 2x7/8", Q235 Plated Dacromet

- Easy and quick installation
- Robust design & material for outdoor use
- Operation Temperature -40~85 °C
- Suitable for cable type 7/8 in

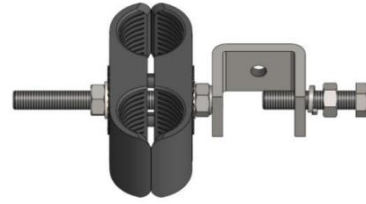

Product Classification

| | |
|--------------------|------------------------------------------------------------------------------------|
| Item Number | 6003376 |
| Part Number | - |
| Detail Description | Feeder cable clamp, for 2x7/8 in cable, 2 way, includes hardware and angle adapter |

General Specifications

| | |
|-------------------|------------------|
| Metal Material | Galvanized steel |
| Finish | Dacromet |
| Metal Color | Sliver |
| Block Material | PP |
| Block Color | Black |
| Cables Per Hanger | 2 |
| Mounting | M8 hardware |

Dimensions

| | |
|-------------------------------------|--------------------|
| Height | 36.0 mm 1.42 in |
| Width | 85.0 mm 3.35 in |
| Length | 165.0 mm 6.50 in |
| Compatible Cable Jacket OD, maximum | 29.0 mm 1.14 in |
| Compatible Cable Jacket OD, minimum | 27.0 mm 1.06 in |
| Normal Size | 7/8 in |

Environmental Specifications

| | |
|-----------------------------------|----------------------------------------------------------|
| Operating Temperature | -40 °C to +85 °C (-40 °F to +185 °F) |
| Corrosion Resistance | ≥120 hours in salt spray chamber, base on ISO 9227: 2017 |
| UV Resistance | ≥720 hours, base on ISO4892.3-1994 |
| Environmental Strength Capability | Double cable weight |

Packaging and Weights

For more information, please visit:
www.maxdao.com



©Maxdao Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: Sep 4, 2024
 Public

| | |
|--------------------------------------|--------------------------------------------------------------------------------|
| Height, Packed | 300 mm 11.81 in |
| Width, Packed | 500 mm 19.69 in |
| UOM | 1 Pcs |
| Packaging | Bag |
| Weight, Gross | 0.19 kg 0.42 lbs |
| Certifications and Compliance | |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |

