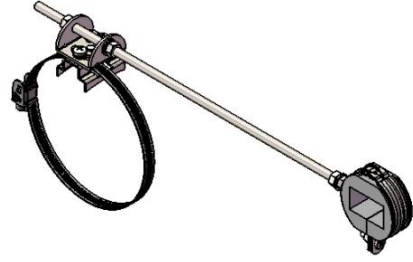


Rotary Waveguide Cable Clamp, Rubber Lining Hole 18x10mm, For R220 Waveguide

- Easy and quick installation
- Robust design & material
- Universal fixing design on bracket, angle steel
- Operation Temperature -40~85 °C
- RoHS certified

**Product Classification**

Item Number	6003619
Part Number	-
Detail Description	Rotary waveguide cable clamp, rubber lining hole 18x10mm, for R220/R260 waveguide

General Specifications

Metal Parts Material	Stainless steel 304
Finish	Passivation
Rubber Material	Natural Rubber
Rubber Color	Black
Applied Pole Size	40 - 150 mm 1.57 - 5.91 in
Waveguide Size	WR42 WG20 R220 & WR34 WG21 R260

Dimensions

Threaded Rod Length	400 mm 15.75 in
Rotary Adapter Width	45 mm 1.77 in
Round Member Adapter Width	12 mm 0.47 in
Rubber Lining Hole	18 mm X 10 mm 0.71 in X 0.39 in

Environmental Specifications

Operating Temperature	-40 °C to +85 °C (-40 °F to +185 °F)
Corrosion Resistance	≥720 hours in salt spray chamber, base on IEC 60068-2-11
UV Resistance	≥720 hours, base on ISO4892.3-1994

Packaging and Weights

Height, Packed	600 mm 23.62 in
Width, Packed	200 mm 7.87 in
UOM	1 Pcs
Packaging	Bag

For more information, please visit:
www.maxdao.com



©Maxdao Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: Sep 13, 2024

Public

Weight, Gross	0.393 kg 0.866 lbs
---------------	----------------------

Certifications and Compliance	
--------------------------------------	--

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
---------------	--

RoHS	Compliant
------	-----------

