


Rotary Waveguide Cable Clamp, Rubber Lining Hole 28x17mm, For R120 Waveguide

- Easy and quick installation
- Robust design & material
- Universal fixing design on bracket, angle steel
- Operation Temperature -40~85 °C
- RoHS certified

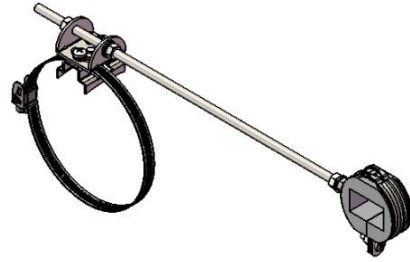

Product Classification

Item Number	6003642
Part Number	-
Detail Description	Rotary waveguide cable clamp, rubber lining hole 28x17mm, for R120 waveguide

General Specifications

Metal Parts Material	Stainless steel 304
Finish	Passivation
Rubber Material	Natural Rubber
Rubber Color	Black
Applied Pole Size	40 - 150 mm 1.57 - 5.91 in
Waveguide Size	WR75 WG17 R120

Dimensions

Threaded Rod Length	400 mm 15.75 in
Rotary Adapter Width	45 mm 1.77 in
Round Member Adapter Width	12 mm 0.47 in
Rubber Lining Hole	28 mm X 17 mm 1.10 in X 0.67 in

Environmental Specifications

Operating Temperature	-40 °C to +85 °C (-40 °F to +185 °F)
Corrosion Resistance	≥720 hours in salt spray chamber, base on IEC 60068-2-11
UV Resistance	≥720 hours, base on ISO4892.3-1994

Packaging and Weights

Height, Packed	600 mm 23.62 in
Width, Packed	200 mm 7.87 in
UOM	1 Pcs
Packaging	Bag

Weight, Gross	0.386 kg 0.851 lbs
---------------	----------------------

Certifications and Compliance	
--------------------------------------	--

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
---------------	--

RoHS	Compliant
------	-----------

