


2/10 Disconnection Module Assembly With 1U Subrack

- 19" Rack Mountable
- 4 nos of 10 Pair disconnection module
- Integrated Back Mount Frame (BMF)
- Identification numbering system provided

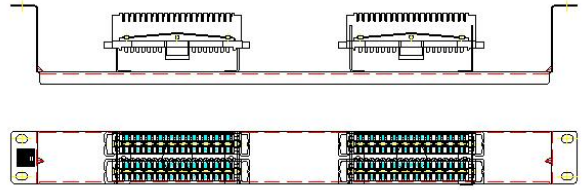

Product Classification

Item Number	6004404
Part Number	-
Detail Description	2/10 Disconnection module assembly with 1U subrack

General Specifications

Subrack Material	CRCA Steel
Surface Treatment	Yellow Passivation
Number Of 2/10 Disconnection Module	4
Conductor 2 Wires Per Contact	0.40 to 0.63 mm
Conductor 1 Wires Per Contact	0.63 to 0.80 mm
Insulation Wires Per Contact	0.7 to 1.6 mm

Dimensions

Length	482.6 mm 19 in
Width	63.5 mm 2.5 in
Height	44.45 mm 1 U

Environmental Specifications

Operating Temperature	-5 °C to +60 °C (+23 °F to +140 °F)
Relative Humidity	95%, No Water Condensation, No Ice

Electrical Specifications

Connection Frequency	> 200 times
Test access Plug In Cycles	> 250

Packaging and Weights

Height, Packed	500 mm 19.68 in
Width, Packed	300 mm 11.81 in
UOM	Pcs
Packaging	Bag

Weight, Gross	2.145 kg 4.728 lbs
---------------	----------------------

Certifications and Compliance	
--------------------------------------	--

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
---------------	--

RoHS	Compliant
------	-----------

