


## Grounding Kit, Tinned Universal Type, 1/2"-3", 1.5 Meter, Without Weatherproof Kit

- Easy and quick installation
- Low contact transition resistance of maximum 10mΩ
- Operation Temperature -40~70 °C
- Waterproof IP68

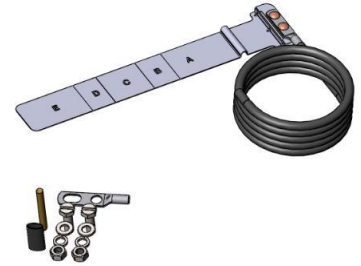

### Product Classification

Item Number	6006079
Part Number	-
Detail Description	Grounding kit, tinned universal type, for 1/2"-3" cable, 1.5 meter, without weatherproof Kit

### General Specifications

Bonding Conductor Material	Copper
Bonding Conductor Wire Size	AWG 6
Grounding Strap Material	Copper, Tin Plated
Lug Type	Two-hole lug
Screw Material	Stainless Steel
Flat washer Material	Stainless Steel
Spring washer Material	Stainless Steel
Nut Material	Stainless Steel
PVC tape Material	PVC
Butyl Rubber Tape Material	Butyl

### Dimensions

Bonding Conductor Length	1.5 m   5 feet
Lug Hole Size	3/8"
Screw Size	3/8"x1"
Suitable Cable	1/2"-3"

### Environmental Specifications

Operating Temperature	-40°C to +70 °C (-40 °F to +158 °F)
Weatherproofing Method	Butyl and electric tape

### Electrical Specifications

For more information, please visit:  
[www.maxdao.com](http://www.maxdao.com)



©Maxdao Inc. All rights reserved.  
 The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.  
 Revised: Aug 21, 2024  
 Public

---

Contact Transition Resistance	Maximum 10mΩ
-------------------------------	--------------

---

**Packaging and Weights**

---

Height, Packed	370 mm   14.56 in
----------------	-------------------

---

---

Width, Packed	210 mm   8.26 in
---------------	------------------

---

---

Included	Grounding kit   Hardware   Lug   One roll of PVC tape   One roll of butyl rubber tape
----------	--

---

---

UOM	Pcs
-----	-----

---

---

Packaging	Bag
-----------	-----

---

---

Weight, Gross	0.384 kg   0.846 lbs
---------------	----------------------

---

**Certifications and Compliance**

---

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
---------------	---

---

---

RoHS	Compliant
------	-----------

---

