

Butt Splice , AWG 8#, long barrel

- Suitable for use in circuits rated 35KV or less, proper high voltage spacing and insulation techniques must be used
- Long barrel provides high pull-out force and increased retention for improved mechanical and electrical performance.
- Internal wire stops to prevent over-insertion of conductor.
- Seamless, high conductivity copper tubing for grounding and bonding applications




Product Classification

Item Number	6006915
Part Number	-
Detail Description	Butt Splice , AWG 8#, long barre

General Specifications

Material	Copper
Surface	Tin-plated

Dimensions

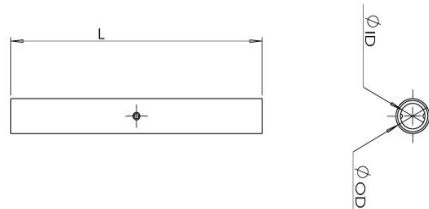

Overall length (L)	1.18 in 30.0 mm
Inner diameter (ID)	0.18 in 4.5 mm
Outer diameter (OD)	0.23 in 6.0 mm

Electrical Specifications

Rating - Maximum Voltage	35KV
--------------------------	------

Environmental Specifications

Operating Temperature	-40 °C to +90°C (-40 °F to +212 °F)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)

Packaging and Weights

Included	Butt Splice
Packaging Quantity and UOM	1 pcs

For more information, please visit:
www.maxdao.com



©Maxdao Inc. All rights reserved.
The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.
Revised: Aug 30, 2024
Public

Piece Weight

0.07 lb | 0.03 kg

Certifications and Compliance

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

RoHS

Compliant

