

## Mechanical Connector, Run 2 to 2/0 AWG, Tap #6 to 2/0 AWG

- Compact, high strength, tin plated copper alloy two pieces connector with spacer and Tin-plated
- Silicon bronze hardware, Recommended for heavy duty connections. Spacer separates Recommended with aluminum and ACSR




### Product Classification

Material Number	6008292
Part Number	-
Detail Description	Mechanical Connector, Run 2 to 2/0 AWG, Tap #6 to 2/0 AWG

### General Specifications

Material	Brass
Bolt Material	SS304
Surface	Tin-plated
Mounting Torque	20.3N • M

### Dimensions

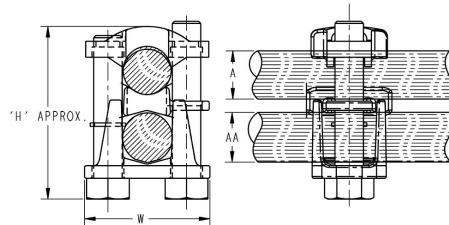

#### Aluminum Cable, Steel Reinforced

RUN "A"	#3 (0.281 in)-2/0 (0.447 in)   7.14-11.35 mm
TAP "AA"	#6 (0.198 in)-2/0 (0.447 in)   5.03-11.35 mm

#### Galvanized Steel Stranded

RUN "A"	5/16 (0.312 in)-7/16 (0.435 in)   7.92-11.05 mm
TAP "AA"	3/16 (0.187 in)-7/16 (0.435 in)   4.75-11.05 mm

#### Copper & Copper weld Solid

RUN "A"	#1 (0.289 in)-3/0 (0.410 in)   7.34-10.41 mm
TAP "AA"	#6 (0.162 in)-3/0 (0.410 in)   4.11-10.41 mm

#### Copper & Aluminum Stranded

RUN "A"	#2 (0.292 in)-2/0 (0.419 in)   7.42-10.64 mm
---------	--

For more information, please visit:  
[www.maxdao.com](http://www.maxdao.com)



©Maxdao Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: Feb 1, 2024

Public

DATASHEET

TAP "AA"	#6 (0.184 in)-2/0 (0.419 in)   4.67-10.64 mm
"H"Approx	2.00 in lb   50.8mm
Bolt Size	M8

**Packaging and Weights**

UOM	1 pcs
Packaging	Bag
Weight, gross	0.77 lb   0.35 kg

**Certifications and Compliance**

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

