

## Copper Ferrule Lug , 2.5mm<sup>2</sup>, Single Wire, Nylon-insulated,Blue

- Copper Tube Terminals between 0.14mm<sup>2</sup> & 150mm<sup>2</sup> have bell entry to ensure easy entry even for flexible conductors.
- Insulated ferrules prevent conductor breakage due to bending, wire stress or vibration, while facilitating wire insertions into the terminal block clamp.
- Fraying and breaking of wire strands is prevented and the possibility of an unreliable connection is minimized.
- Colour code meets Indian wire colour standards IS694-2010.




### Product Classification

Item Number	6008337
Part Number	-
Detail Description	Copper Ferrule Lug , 2.5mm <sup>2</sup> , Single Wire, Nylon-insulated,Blue

### General Specifications

Colour Code	Blue
Material	Copper
Insulation collar Material	Nylon
Surface	Tin-plated

### Dimensions

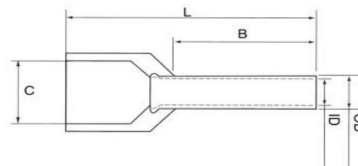

Barrel length (B)	0.47 in   12.0 mm
Overall length (L)	0.71 in   18.0 mm
Inner diameter (ID)	0.09 in   2.2 mm
Outer diameter (OD)	0.10 in   2.5 mm
Inner dimensions of the insulating collar (C)	0.17 in   4.2 mm

### Electrical Specifications

Rating - Maximum Voltage	35KV
--------------------------	------

### Environmental Specifications

For more information, please visit:  
[www.maxdao.com](http://www.maxdao.com)



©Maxdao Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: Aug 30, 2024  
 Public

Operating Temperature -40 °C to +90°C (-40 °F to +212 °F)

Storage Temperature -40 °C to +80 °C (-40 °F to +176 °F)

---

**Packaging and Weights**

---

Included Lug

Packaging Quantity and UOM Kit of 100

Piece Weight 0.088 lb | 0.04 kg

---

**Certifications and Compliance**

---

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

RoHS Compliant

