


Feeder Cable Clamp, 8 holes, 4x18-19mm+4x4-7mm

- Easy and quick installation
- Robust design & material for outdoor use
- Operation Temperature -40~85 °C



| | |
|-------------------------------------|---|
| Classification | |
| Item Number | 6004280 |
| Part number | - |
| Detail Description | Feeder cable clamp, for 4x18-19mm OD cable and 4x4-7mm OD cable |
| General Specifications | |
| Metal Material | Stainless Steel 304 |
| Metal Color | Natural |
| Block Material | PP |
| Block Color | Black |
| Rubber Material | EPDM |
| Rubber Color | Black |
| Mounting | M8 Hardware |
| Cables Per Hanger | 8 |
| Dimensions | |
| Height | 40.0 mm 1.57 in |
| Width | 59.0 mm 2.32 in |
| Length | 240.0 mm 9.45 in |
| Threaded Rod Length | 170.0 mm 6.69 in |
| Compatible Cable 1 OD, maximum | 19.0 mm 0.75 in |
| Compatible Cable 1 OD, minimum | 18.0 mm 0.71 in |
| Compatible Cable 2 OD, maximum | 7.0 mm 0.276 in |
| Compatible Cable 2 OD, minimum | 4.0 mm 0.157 in |
| Environmental Specifications | |
| Operating Temperature | -40°C to +85°C(-40°F to+185°F) |
| Environmental Strength Capability | Double Cable Weight |
| UV Resistance | ≥720 Hours, base on ISO4892.3-1994 |

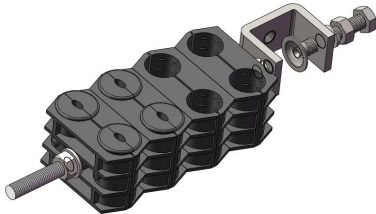

| | |
|--------------------------------------|--|
| Packaging and Weights | |
| Height, Packed | 320 mm 12.60 in |
| Width, Packed | 220 mm 8.66 in |
| UOM | 1 Pcs |
| Packaging | Bag |
| Weight, Gross | 0.285 kg 0.628 lbs |
| Certifications and Compliance | |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| RoHS | Compliant |

