


Gel Seal Closure for 4.3-10 connector to 1/2" & 1/2" superflex cable

- **Wraparound design eliminates the need to disconnect the connectors before installation**
- **Excellent for outdoor use**
- **Excellent weatherproof performance**
- **No tape, no mastics or tools required for installation and removal**

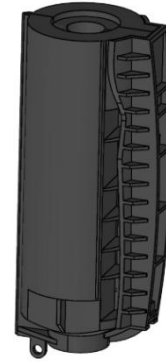

Product Classification

| | |
|--------------------|---|
| Material Number | 6002030 |
| Part Number | - |
| Status | Active |
| Detail description | Weatherproofing gel sealed antenna transition boot for 4.3-10 connector, applied to 1/2" & 1/2" superflex cable |

General Specifications

| | |
|-------------|---|
| Material | Polypropylene(PP) & Gel |
| Cable type | Corrugated Smoothwall |
| Application | 4.3-10 connector with 1/2" or 1/2" superflex jumper |
| Color | Black |

Dimensions

| | |
|----------------|-------------------|
| Length | 112 mm 4.41 in |
| Width | 37.5 mm 1.48 in |
| Inner diameter | 21.5 mm 0.85 in |

Environmental Specifications

| | |
|-----------------------|-------------------------------------|
| UV resistance | ≥720Hours, based on ISO 4892-3 |
| Operating temperature | -20 °C to +60 °C (-4 °F to +140 °F) |
| Waterproof resistance | IP68, based on ISO20653:2013 |

Packaging and Weights

DATASHEET

| | |
|----------------------------|--------------------|
| Bag width | 80 mm 3.15 in |
| Bag length | 165 mm 6.50 in |
| Packaging quantity and UOM | 1 pcs |
| Weight gross | 0.059 kg 0.13 lb |

Certifications and Compliance

| | |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| ROHS | Compliant |

