


Copper Lug, AWG 6#, two hole 1/4", hole spacing 3/4"-1", long barrel, with inspection window,blue

- Copper cable lugs are designed for connecting copper cables, coils and Bus-bars
- Copper Tube Terminals between 6mm² & 800mm² have bell entry to ensure easy entry even for flexible conductors.
- Incorporates inspection window to check the correct cable positioning
- Long barrel provides high pull-out force and increased retention for improved mechanical and electrical performance.
- "colour code" help choose the right connector,the colour name is also printed in order to avoid problems for those who are colour-blind.
- A hole with elliptical design is suitable for more spacing.

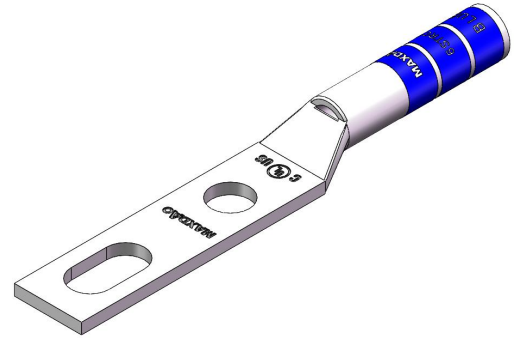


Product Classification

Item Number	6005878
Part Number	-
Detail Description	Copper Lug, AWG 6#, two hole 1/4", hole spacing 3/4"-1", long barrel, with inspection window,blue

General Specifications

Color Code	Blue
Material	Copper
Tongue Type	Standard
Tongue Angle	Straight
Surface	Tin-plated
Inspection Window	With inspection window

Dimensions



Bolt Size	1/4 in 6.9 mm
Hole Spacing (H)	3/4 in 19.0 mm
Hole Spacing(H1)	1.00 in 25.4 mm
Tang Width (C)	0.58 in 12.2 mm
Barrel length (B)	1.12 in 29.2 mm
Overall length (L)	2.90 in 74.0 mm

For more information, please visit:
www.maxdao.com



©Maxdao Inc. All rights reserved.

The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.

Revised: Sep 26, 2024

Public

Inner diameter (ID)	0.22 in 5.6mm
Outer diameter (OD)	0.31 in 7.9 mm

Electrical Specifications

Rating - Maximum Voltage	35KV
--------------------------	------

Environmental Specifications

Operating Temperature	-40 °C to +90°C (-40 °F to +212 °F)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)

Packaging and Weights

Included	Lug
Packaging Quantity and UOM	1 pcs
Piece Weight	0.031 lb 0.014 kg

Certifications

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant
UL	Compliant

